RTS64/81FD

Hardware Kit Includes Loose:

- (1) 24 Hex head bolts (M8-1.25 x 30mm)Grade 8
- (2) 24 Lock washers (M8) Grade 8
- (3) 36 Flat washers (M8) Grade 8
- (4) 12 Lrg. M8-1.25 U-Clip (#18401)
- (5) 12 Hex head nuts (M8-1.25) Grade 8

Hardware Installed at ICI:

- (1) 24–Button head Allen head bolt (M5-1.0x16mmSS) #200308878
- (2) 24- Serrated hex head flanged nuts (M5-1.0 SS) #200391166

Components List:

(1) 2 – Heavy Duty RT Steps

(2) 6 - Mounting Brackets RTSPN010 LOOSE FIT ALL COMPONENTS. DO NOT TIGHTEN UNTIL ALL COMPONENTS ARE INSTALLED


AND ADJUSTED.

DISCLAIMER: USE ONLY COMPONENTS AND HARDWARE **SUPPLIED BY ICI.** NO SUBSTITUTIONS.

Step by Step Installation Instructions

- Read and understand instructions completely before beginning installation. **STEP 1:**
- **STEP 2:** Remove all old steps and hardware from truck.
- **STEP 3:** Locate the driver's side step. (Center of front step is 23" to front of bar.)
- **STEP 4:** Insert the supplied U-Clip nuts into the holes on the inside of the rocker panel and pinch weld (holes may be covered by tape). Refer to hole location on page 2 and "Inside Rocker Panel" figure.
- **STEP 5:** Loose fit front, middle and rear brackets to rocker panel using supplied 8mm bolt, lock washer and flat washer.
- **STEP 6:** Once brackets are loose fit, mount bar to brackets using supplied 8mm bolts, flat washers, lock washers and nuts and finger tighten. Refer to "Bar mount" figure.
- **STEP 7:** Once step is loose fit, fully tighten brackets to inside rocker. Next, adjust bar up/down and front/back then fully tighten step to brackets. Repeat for passenger side.

2004-2008 Ford F150 Crew Cab 2009-2014 Ford F150/Raptor Ext Cab **RTS64/81FD** Installation Instructions

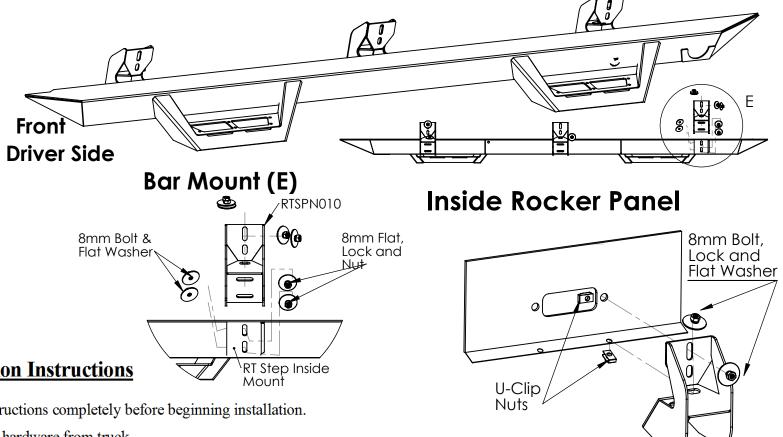

RTSPN010

2004-2008 Ford F150 Crew Cab 2009-2014 Ford F150/Raptor Ext Cab

RTS64/81FD Installation Instructions

Outside RT Step Bracket, Inside Rocker Locations for Ford Raptor/F150.

From underneath the vehicle looking up at the pinch weld area of the inside rocker panel there are 6 vertical holes along the length of the cab. The outside brackets for the RT step mount into the 1st, 3rd and 6th holes. In those locations, the outside bracket will line up with horizontal holes on the inside rocker mount.

